

Features

- Adjustable Output Voltage
- Non-Isolated
- 1-2AMP Adjustable Positive Step Down Integrated Switching Regulator
- Internal Short Circuit Protection
- ON/OFF Control(Ground Off)
- UL94V-0 Package Material
- Wide Input Range
- Efficiency to 96%

Rev.1

Description

The R-6XXX series is a high performance 1.5V to 15V, 1Amp to 2Amp, 12-Pin SIP (single in-line package) integrated switching regulator (ISR). Synchronous rectification yields excellent efficiencies of up to 97%. The devices feature short circuit protection with internal crowbar function to reduce the short circuit input current to under 50mA during fault conditions.

Selection Guide

Part Number SIP12	Input Range (V)	Nominal Output Voltage (V)	Vout Adjust Range (V)	Output Current (A)	Efficiency (%)	
					Vin min. (%)	Vin max. (%)
R-611.8x	9 – 32	1.8	1.5 – 3.6	1	79	67
R-612.5x	9 – 32	2.5	1.5 – 4.5	1	84	74
R-613.3x	9 – 32	3.3	1.8 – 6	1	88	79
R-615.0x	9 – 32	5	1.8 – 9	1	92	84
R-619.0x	11 – 32	9	3.3 – 15	1	96	90
R-6112x	14 – 32	12	3.3 – 15	1	97	92
R-621.8x	9 – 32	1.8	1.5 – 3.6	2	76	68
R-622.5x	9 – 32	2.5	1.5 – 4.5	2	81	74
R-623.3x	9 – 32	3.3	1.8 – 6	2	86	80
R-625.0x	9 – 32	5	1.8 – 9	2	90	85
R-629.0x	11 – 32	9	3.3 – 15	2	95	91
R-6212x	14 – 32	12	3.3 – 15	2	96	93

Note: $V_{in} - V_{out} \geq 1.5V$ if adjust function is used!

Suffix x: (see mechanical drawing for details)

x = P pins vertical through hole

x = D pins bent for horizontal through hole mounting

Specifications (refer to the standard application circuit, Ta: 25°C)

Characteristics	Conditions	Min.	Typ.	Max.
Input Voltage Range	$V_{out} = 1.8V$	9V		32V
	$V_{out} = 2.5V$	9V		32V
	$V_{out} = 3.3V$	9V		32V
	$V_{out} = 5V$	9V		32V
	$V_{out} = 9V$	11V		32V
	$V_{out} = 12V$	14V		32V
Output Voltage Adjust Range (see table 1)	$V_{out} = 1.8V$	1.5V	1.8V	3.6V
	$V_{out} = 2.5V$	1.5V	2.5V	4.5V
	$V_{out} = 3.3V$	1.8V	3.3V	6V
	$V_{out} = 5V$	1.8V	5V	9V
	$V_{out} = 9V$	3.3V	9V	15V
	$V_{out} = 12V$	3.3V	12V	15V

Continued on next page

INNOLINE
DC/DC-Converter

R-6xxxP_D Series

**1-2 AMP
SIP12
Vertical &
Horizontal**



RECOM



Specifications (refer to the standard application circuit, Ta: 25°C)

Characteristics	Conditions	Min.	Typ.	Max.
Output Current	R-61xxP/D	0.1A		1.0A
	R-62xxP/D	0.2A		2.0A
Output Current Limit		4A	4.5A	5A
Short Circuit Input Current	Vin > 12V	20mA		100mA
Short Circuit Protection		Continuous, automatic recovery		
Output Voltage Accuracy	At 100% Load		±1%	±2%
Line Voltage Regulation (Vin = min. to max. at full load)			0.5%	
Load Regulation (10 to 100% full load)	R-61xxP/D			0.5%
	R-62xxP/D			1.0%
Vo Ripple & Noise	R-61xxP/D		40mVpp	100mVpp
	R-62xxP/D		40mVpp	120mVpp
Transient Response (see note 1)	50% Load Change		100us	200us
	Vout Over / Undershoot		5%	
Remote ON / OFF (see note 2) (positive logic)	Open or high (Power ON)	2.0V		10V
	Low (Power OFF)			0.8V
Remote Off Input Current	Remote ON/OFF low level		100µA	
Switching Frequency		200kHz	250kHz	300kHz
Quiescent Current	Vin = min. to max. at 0% load		6mA	10mA
Operating Temperature Range		-40°C		+85°C
Storage Temperature Range		-40°C		+125°C
internal Power Dissipation	Io x Vo x (1-Efficiency)			1.0W
Package Weight				9g
MTBF (Nominal Vout, 100% load)	Tamb. = +25°C			563 x 10 ³ hours
	Tamb. = +71°C			117 x 10 ³ hours

Notes:

- Requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications (the capacitor to be placed as close as possible to the output pins).
- ON / OFF pin can be driven by TTL (logic gate), open-collector bipolar transistor or open-drain MOSFET.
- Output Current vs. Input Voltage (see graph below).

Output Current vs Input Voltage

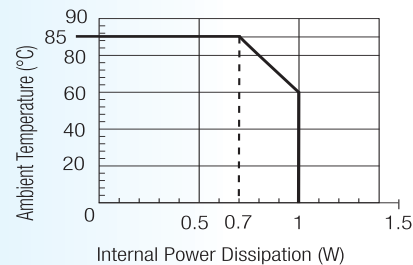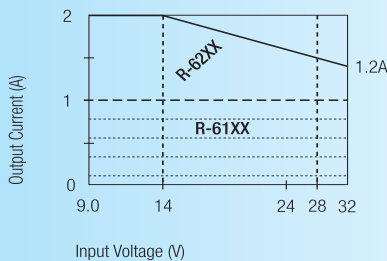

Max output current calculation:

Internal power dissipation
 $(1W) = I_o \times V_o \times (1-\text{Efficiency})$
 $I_o = 1(W) / V_o \times (1-\text{Efficiency})$

Example : R-6212P

at Vin = 28VDC


Efficiency = 94% (see "Selection Guide" table)
 $V_o = 12VDC$
 $I_o = 1W / 12V \times (1-0.94) = 1.388A = 1.5A$

at Vin = 14VDC


Efficiency = 96% (see "Selection Guide" table)
 $V_o = 12Vdc$
 $I_o = 1W / 12V \times (1-0.96) = 2.08A$ (spec. = 2A max.)

Characteristics


R-623.3 / R-613.3
Efficiency vs Output Current

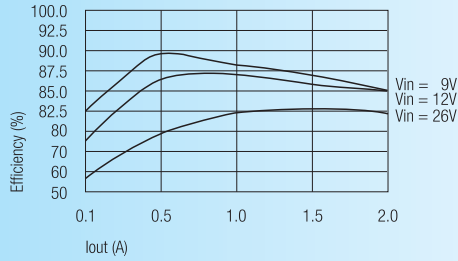


R-623.3 / R-613.3
Ripple vs Output Current

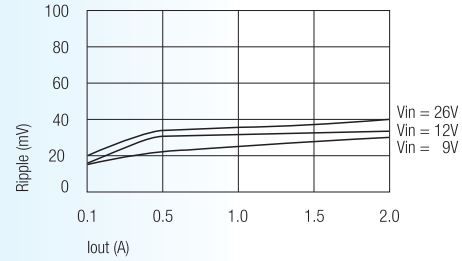

R-625.0 / R-615.0
Efficiency vs Output Current

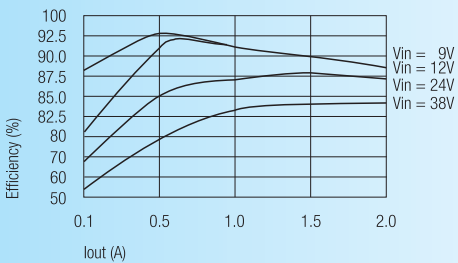


R-625.0 / R-615.0
Ripple vs Output Current

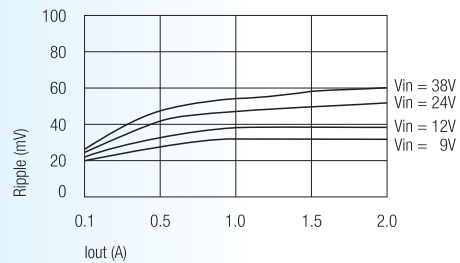

Package Style and Pinning (mm)

SIP12 PIN Package

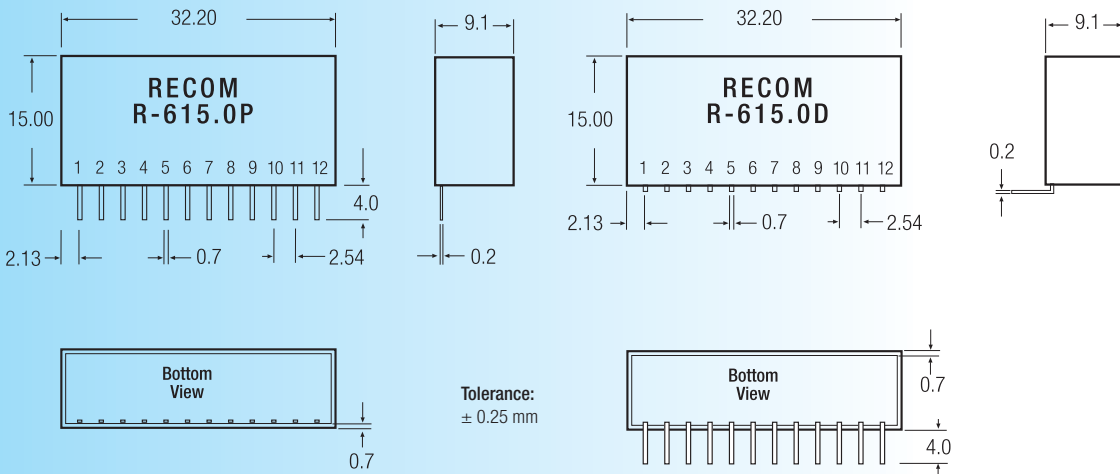


Pin Connections

Pin #	Name	Description
1	ON / OFF	Input pin : Active low (less than 0.8V) to disable the device
2, 3, 4	Vin	Power input
5, 6, 7, 8	GND	Input and output ground (common)
9, 10, 11	Vout	Power output
12	Vout-Adj	With external resistors R1,R2 to selected output voltage

Table 1: Adjustment Resistor Values

1ADC	R-611.8P/D		R-612.5P/D		R-613.3P/D		R-615.0P/D		R-619.0P/D		R-6112P/D	
2ADC	R-621.8P/D		R-622.5P/D		R-623.3P/D		R-625.0P/D		R-629.0P/D		R-6212P/D	
Vout (nominal)	1.8VDC		2.5VDC		3.3VDC		5VDC		9VDC		12VDC	
Vout (adj)	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2
1.5	13.6K Ω		3.3K Ω									
1.8			8.2K Ω		3.1K Ω		820 Ω					
2.0	10K Ω		15K Ω		5.1K Ω		1.5K Ω					
2.5	5.1K Ω				13K Ω		3.6K Ω					
3.0	2.5K Ω		10K Ω		51K Ω		7.0K Ω					
3.3	1.7K Ω		5.9K Ω				9.7K Ω		0 Ω		0 Ω	
3.6	1.2K Ω		3.9K Ω		18K Ω		14K Ω		1.5K Ω		560 Ω	
3.9			2.8K Ω		9.1K Ω		20K Ω		3.3K Ω		1.2K Ω	
4.5			1.6K Ω		3.9K Ω		60K Ω		7.5K Ω		2.1K Ω	
5.0					2.4K Ω				11K Ω		4.0K Ω	
5.1					2.2K Ω		60K Ω		12K Ω		4.3K Ω	
5.5					1.6K Ω		15K Ω		17K Ω		5.6K Ω	
6.0					1.1K Ω		7.2K Ω		24K Ω		7.5K Ω	
7.0							2.8K Ω		51K Ω		12K Ω	
8.0							1.5K Ω		130K Ω		19K Ω	
9.0							880 Ω				31K Ω	
10							450 Ω		36K Ω		55K Ω	
11							180 Ω		15K Ω		125K Ω	
12									8.2K Ω			
13									4.7K Ω		11K Ω	
14									2.7K Ω		4.0K Ω	
15									1.3K Ω		1.6K Ω	

Standard Application Circuit

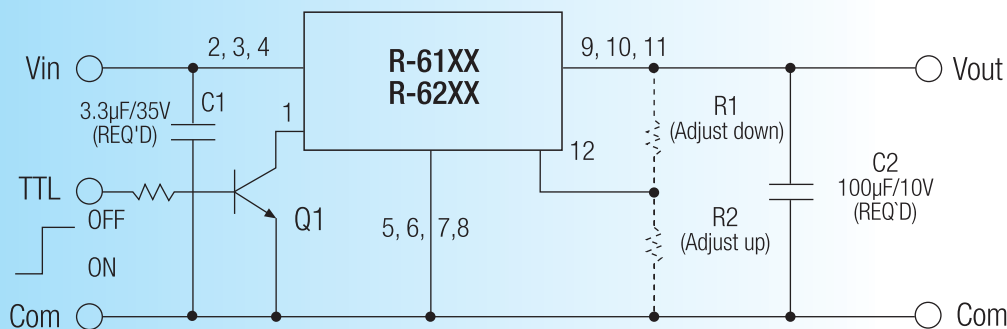

Add a blocking diode to Vout if current can flow backwards into the output, as this can damage the converter..