

Features

Regulated Converters

Rev. 1

- 2kV, 4kVDC & 6kVDC Isolation
- Industry Standard 3W DIP24 Package
- Feedback Regulated Output
- Continuous Short Circuit Protection
- Wide Input 2:1 & 4:1
- Medical Approvals (4kV/6kV Versions)
- EN and UL Certificates
- 3 Pinout Options, 3 Case Styles
- Control Pin Option
- Efficiency to 86%

Description

Besides the standard isolation of 2kVDC, this series offers options of 4kVDC (= "/H4") or 6kVDC (= "/H6") making it suitable for medical applications and other sophisticated industrial applications. Packaging can be either DIP-24 plastic or 5-side-shielded DIP24 metal case (= option "/M") as well as SMD pinning (= option "/SMD"). For all the above variants, 2 industry-standard pinouts (= option "/A" or "/C") are available, and B pinning is available with 1.6kVDC isolation. Remote on/off control is possible with the /CTRL option (A pinning only)

Selection Guide

| Part Number DIP24 (SMD) | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency (%) | Max. Cap. Load |
|----------------------------|-----------------------------------|----------------------|---------------------|----------------|----------------|
| REC3-xx3.3SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 3.3 | 900 | 66-76 | 2200µF |
| REC3-xx05SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 5 | 600 | 71-79 | 1000µF |
| REC3-xx09SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 9 | 330 | 74-83 | 470µF |
| REC3-xx12SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 12 | 250 | 75-85 | 220µF |
| REC3-xx15SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 15 | 200 | 75-86 | 120µF |
| REC3-xx05DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±5 | ±300 | 74-83 | ±470µF |
| REC3-xx12DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±12 | ±125 | 75-85 | ±100µF |
| REC3-xx15DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±15 | ±100 | 75-86 | ±68µF |
| REC3-xx3.3SRWZ/H* | 9 - 36, 18 - 72 | 3.3 | 900 | 77-79 | 2200µF |
| REC3-xx05SRWZ/H* | 9 - 36, 18 - 72 | 5 | 600 | 78-80 | 1000µF |
| REC3-xx09SRWZ/H* | 9 - 36, 18 - 72 | 9 | 330 | 80-83 | 470µF |
| REC3-xx12SRWZ/H* | 9 - 36, 18 - 72 | 12 | 250 | 83-85 | 220µF |
| REC3-xx15SRWZ/H* | 9 - 36, 18 - 72 | 15 | 200 | 83-85 | 120µF |
| REC3-xx05DRWZ/H* | 9 - 36, 18 - 72 | ±5 | ±300 | 77-80 | ±470µF |
| REC3-xx12DRWZ/H* | 9 - 36, 18 - 72 | ±12 | ±125 | 83-85 | ±100µF |
| REC3-xx15DRWZ/H* | 9 - 36, 18 - 72 | ±15 | ±100 | 83-85 | ±68µF |

H* = H2, H4 or H6 for A or C pinning options with 2kVDC, 4kVDC or 6kVDC isolation. H*

= H for B pinning option with 1.6kVDC isolation only.

2:1 Input
(REC3-S/DRWH4/H6)
xx = 4.5-9Vin = 05
xx = 9-18Vin = 12
xx = 18-36Vin = 24
xx = 36-72Vin = 48

4:1 Input
(REC3-S/DRWZ(H4/H6))
xx = 9-36Vin = 24
xx = 18-72Vin = 48

- * add suffix "/A", "/B" or "/C" for pinning options, see next page and Isolation Restrictions.
- * add suffix "/M" for metal case.
- * add suffix "/SMD" for SMD package.
- * add suffix "/CTRL" for control pin option (A Pinning only)

Ordering Examples:


REC3-0512DRW/H2/A/CTRL = 2:1 input, 5V Vin, ±12V Vout, 2kVDC, pinout "A", plastic case, control pin
 REC3-4812SRWZ/H4/A/M = 4:1 input, 48V Vin, 12V Vout, 4kVDC, pinout "A", metal case, no control pin
 REC3-1212DRWZ/H/B = 4:1 input, 12V Vin, ±12V Vout, 1.6kVDC, pinout "B", plastic case, no control pin
 REC3-0505SRW/H6/C/SMD = 2:1 input, 5V Vin, 5V Vout, 6kVDC, SMD pinout "C", plastic case, no control pin

ECONOLINE

DC/DC-Converter

REC3-S_DRW(Z)/H* Series

3 Watt
DIP24 & SMD
Single & Dual
Output

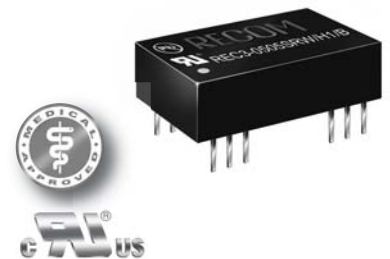

EN-60950-1 Certified
UL-60950-1 Certified
EN-60601-1 Certified

RECOM

Isolation Restrictions

'B' Pinning is restricted to 1.6kV isolation due to the closeness of the input and output pins.



If the options "/M" for metal case and "/SMD" for SMD pinout are combined, the maximum allowed isolation voltage is 2kVDC because of the shorter distances between pins and the metal case.

DIP-24 through-hole case and SMD-plastic case are not affected and offer the full isolation barriers of 2kV through to 6kVDC.

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

| | | | |
|---|---|----------------------------|------------------------------|
| Input Voltage Range | | | 2:1 & 4:1 |
| Output Voltage Accuracy | | | $\pm 2\%$ max. |
| Line Regulation (HL-LL) | | | $\pm 0.4\%$ max. |
| Load Regulation (for output load current change from 20% to 100%) | | | $\pm 0.6\%$ max. |
| Output Ripple and Noise (0,1 μF capacitor on output, 20MHz BW) | | | 50mVp-p max. |
| Switching Frequency at Full Load | 2:1 Input types | 90kHz min. / 150kHz max. | |
| and nominal Input Voltage | 4:1 Input types | 120kHz min. / 180kHz max. | |
| Input Filter | | | Pi Network |
| Efficiency at Full Load | | | see above |
| No Load Power Consumption | | | 300mW max. |
| Isolation Voltage | H2 types | (tested for 1 second) | 2000VDC min. |
| Rated Working Voltage | (see note) | (long term isolation) | see Application Notes |
| Isolation Voltage | H4 types | (tested for 1 second) | 4000VDC min. |
| Rated Working Voltage | (see note) | (long term isolation) | see Application Notes |
| Isolation Voltage | H6 types | (tested for 1 second) | 6000VDC min. |
| Rated Working Voltage | (see note) | (long term isolation) | see Application Notes |
| Isolation Capacitance | 2:1 Input types | 20pF min. / 60pF max. | |
| | 4:1 Input types | 40pF min. / 80pF max. | |
| Isolation Resistance | | | 1 G Ω min. |
| Short Circuit Protection | | | Continuous, Auto Restart |
| Operating Temperature Range (free air convection) | 5V input types | -40°C to +80°C (see Graph) | |
| | others | -40°C to +85°C (see Graph) | |
| Storage Temperature Range | | | -55°C to +125°C |
| Relative Humidity | | | 95% RH |
| Case Material | | | Non-Conductive Plastic |
| Thermal Impedance | Natural convection | 20°C/W for metal case | |
| Package Weight | | | 13g |
| MTBF (+25°C) | } Detailed Information see Application Notes chapter "MTBF" | using MIL-HDBK 217F | 1043 x 10 ³ hours |
| (+85°C) | | using MIL-HDBK 217F | 186 x 10 ³ hours |

Derating-Graph (Ambient Temperature)

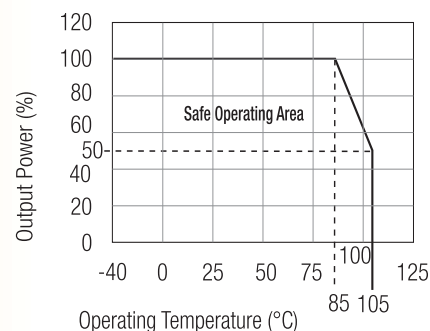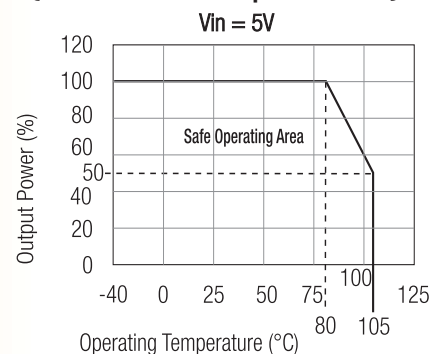


Ordering Examples:


REC3-0512DRW/H2/A/CTRL= 2:1 input, 5V V_{in} , $\pm 12V$ V_{out} , 2kVDC, pinout "A", plastic case, control pin
 REC3-4812SRWZ/H4/A/M = 4:1 input, 48V V_{in} , 12V V_{out} , 4kVDC, pinout "A", metal case, no control pin
 REC3-1212DRWZ/H/B = 4:1 input, 12V V_{in} , $\pm 12V$ V_{out} , 1.6kVDC, pinout "B", plastic case, no control pin
 REC3-0505SRW/H6/C/SMD = 2:1 input, 5V V_{in} , 5V V_{out} , 6kVDC, SMD pinout "C", plastic case, no control pin

Typical Characteristics


Single 2:1 Input

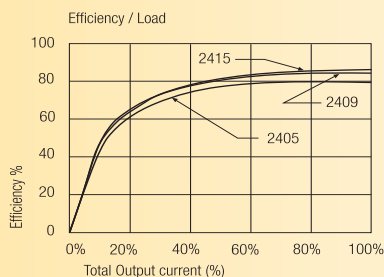

Single 2:1 Input

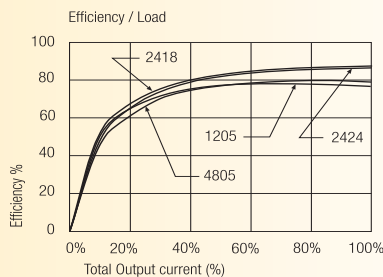


Dual 2:1 Input

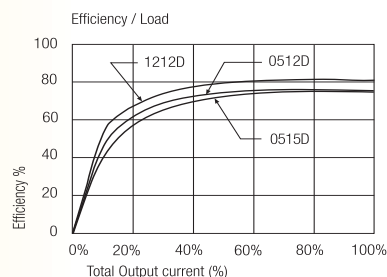


Typical Characteristics - Continued


Single 4:1 Input

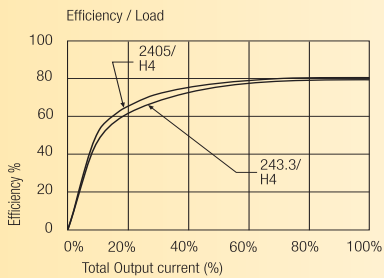

Single 4:1 Input



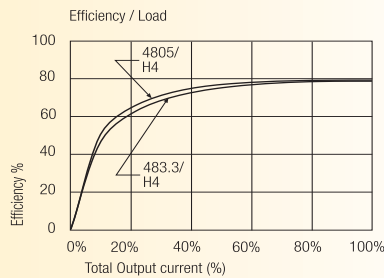


Dual 4:1 Input

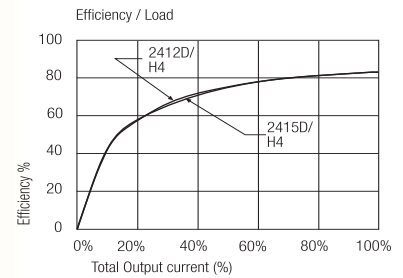


Package Style and Pinning (mm) DIP 24 , Wide Input 2:1 & 4:1

"A" Pinning
/H2, /H4 & /H6



Recommended Footprint Details



Pin Connections


| Pin # | Single | Dual |
|------------|--------|-------|
| 1 (option) | CTRL | CTRL |
| 2 | -Vin | -Vin |
| 3 | -Vin | -Vin |
| 9 | NC | Com |
| 11 | NC | -Vout |
| 14 | +Vout | +Vout |
| 16 | -Vout | Com |
| 22 | +Vin | +Vin |
| 23 | +Vin | +Vin |

NC = No Connection




XX.X ± 0.5 mm
XX.XX ± 0.25 mm

CTRL Option


ON = Open or $0V < V_{ctrl} < 1.2V$
OFF = $2.2V < V_{ctrl} < 12V$

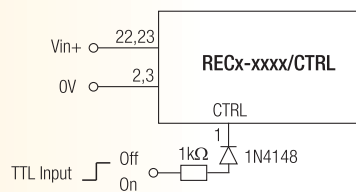

"C" Pinning
/H2, /H4 & /H6



Recommended Footprint Details



Pin Connections



| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | +Vin | +Vin |
| 2 | +Vin | +Vin |
| 10 | NC | Com |
| 11 | NC | Com |
| 12 | -Vout | NC |
| 13 | +Vout | -Vout |
| 15 | NC | +Vout |
| 23 | -Vin | -Vin |
| 24 | -Vin | -Vin |

NC = No Connection



XX.X ± 0.5 mm
XX.XX ± 0.25 mm

Package Style and Pinning (mm) DIP 24 , Wide Input 2:1 & 4:1

**"B" Pinning
/H (1.6kV Only)**



Recommended Footprint Details



Pin Connections



| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | +Vin | +Vin |
| 2 | No Pin | -Vout |
| 3 | No Pin | Com |
| 10 | -Vout | Com |
| 11 | +Vout | +Vout |
| 12 | -Vin | -Vin |
| 13 | -Vin | -Vin |
| 14 | +Vout | +Vout |
| 15 | -Vout | Com |
| 22 | No Pin | Com |
| 23 | No Pin | -Vout |
| 24 | +Vin | +Vin |

NC = No Connection


XX.X ± 0.5 mm

XX.XX ± 0.25 mm


SMD Pinning



Tol.: ± 0.35 mm



Recommended Footprint Details

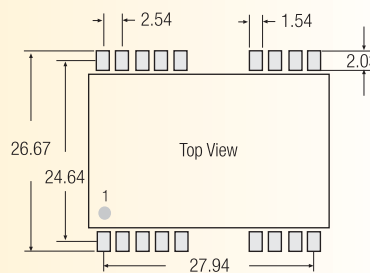

SMD pin connections follow standard package A (/A/SMD), B (/B/SMD) or C (/C/SMD) pinning.

All unused pins are NC (No Connection). See Below for detailed pinout lists

for all packages incl.SMD case the length of plastic case is 31,8 mm, length of metal case 32.0 mm

/A/SMD Pinning

/B/SMD Pinning

/C/SMD Pinning

| Pin Connections | | | Pin Connections | | | Pin Connections | | | Pin Connections | | | Pin Connections | | | Pin Connections | | |
|-----------------|--------|-------|-----------------|--------|-------|-----------------|--------|-------|-----------------|--------|-------|-----------------|--------|------|-----------------|--------|-------|
| Pin # | Single | Dual | Pin # | Single | Dual | Pin # | Single | Dual | Pin # | Single | Dual | Pin # | Single | Dual | Pin # | Single | Dual |
| 1 (Option) | CTRL | CTRL | 13 | NC | NC | 1 | +Vin | +Vin | 13 | -Vin | -Vin | 1 | +Vin | +Vin | 13 | +Vout | -Vout |
| 2 | -Vin | -Vin | 14 | +Vout | +Vout | 2 | NC | -Vout | 14 | +Vout | +Vout | 2 | +Vin | +Vin | 14 | NC | NC |
| 3 | -Vin | -Vin | 15 | NC | NC | 3 | NC | Com | 15 | -Vout | Com | 3 | NC | NC | 15 | NC | +Vout |
| 4 | NC | NC | 16 | -Vout | Com | 4 | NC | NC | 16 | NC | NC | 4 | NC | NC | 16 | NC | NC |
| 5 | NC | NC | 20 | NC | NC | 5 | NC | NC | 20 | NC | NC | 5 | NC | NC | 20 | NC | NC |
| 9 | NC | Com | 21 | NC | NC | 9 | NC | NC | 21 | NC | NC | 9 | NC | NC | 21 | NC | NC |
| 10 | NC | NC | 22 | +Vin | +Vin | 10 | -Vout | Com | 22 | NC | Com | 10 | NC | Com | 22 | NC | NC |
| 11 | NC | -Vout | 23 | +Vin | +Vin | 11 | +Vout | +Vout | 23 | NC | -Vout | 11 | NC | Com | 23 | -Vin | -Vin |
| 12 | NC | NC | 24 | NC | NC | 12 | -Vin | -Vin | 24 | +Vin | +Vin | 12 | -Vout | NC | 24 | -Vin | -Vin |